



WEET Technology Company Limited

FAST RECOVERY RECTIFIER

BA157S THRU BA159S

VOLTAGE RANGE 600 to 1000 Volts
CURRENT 1.0 Ampere

FEATURES

- High surge current capability
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- Void-free Plastic in a **A-405** package
- 1.0 ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228

MECHANICAL DATA


Case: Molded plastic, A-405

Terminals: Axial leads, solderable per MIL-STD-202, Method 208

Polarity: Band denotes cathode

Mounting Position: Any

Weight: 0.012 ounce, 0.3 gram

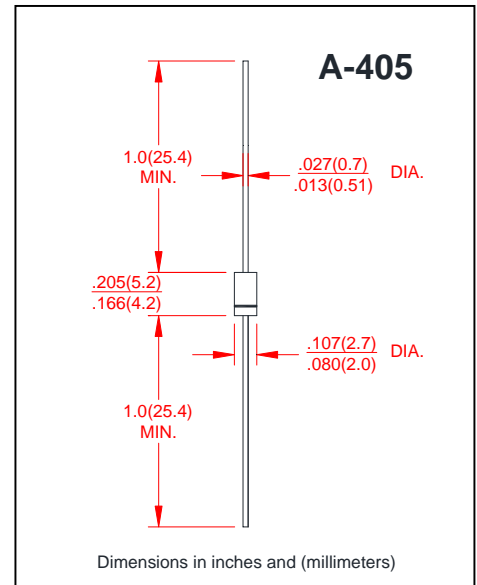

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	BA157S	BA158S	BA159S	UNITS
Maximum Recurrent Peak Reverse Voltage	400	600	1000	V
Maximum RMS Voltage	280	420	700	V
Maximum DC Blocking Voltage	400	600	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) lead length at $T_A=55^\circ\text{C}$	1.0			A
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load(JEDEC method)	30			A
Maximum Forward Voltage at 1.0A	1.3			V
Maximum Reverse Current $T_J=25^\circ\text{C}$	5.0			μA
at Rated DC Blocking Voltage $T_J=100^\circ\text{C}$	500			
Typical Junction capacitance (Note 1)	12			PF
Maximum Reverse Recovery Time(Note 2)	150		250	ns
Operating and Storage Temperature Range	-55 to +150			$^\circ\text{C}$

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
2. Reverse Recovery Test Conditions: $I_F=.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=.25\text{A}$

BA157S THRU BA159S

VOLTAGE RANGE 600 to 1000 Volts
CURRENT 1.0 Ampere


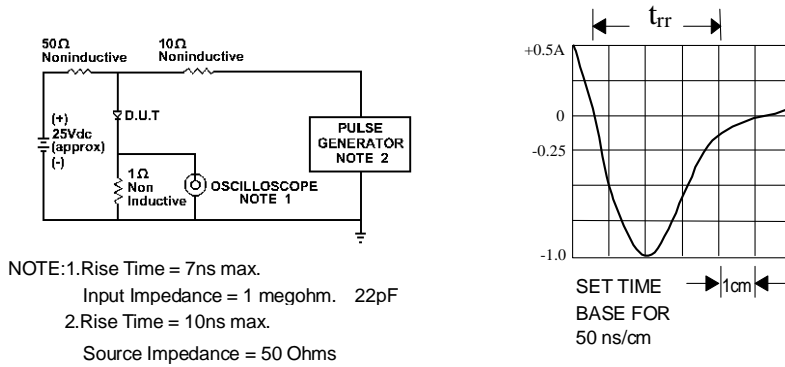


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

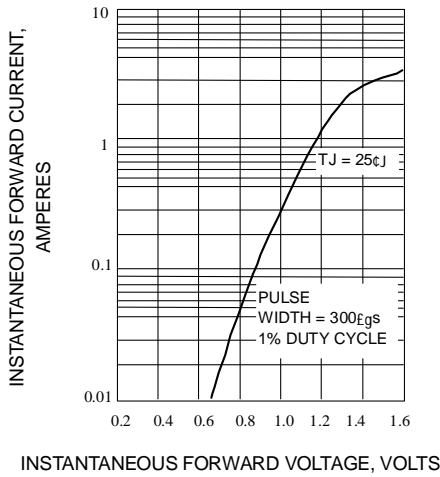

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

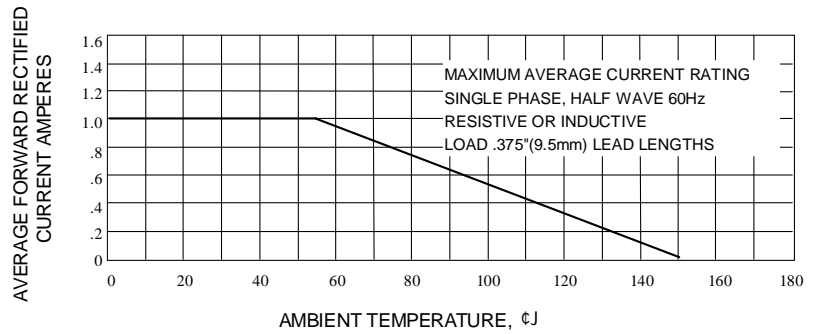


Fig. 3-FORWARD CURRENT DERATING CURVE

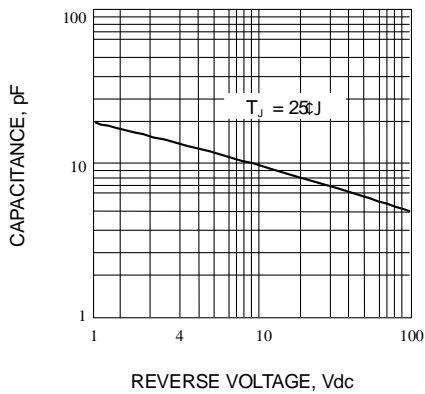


Fig. 4-TYPICAL JUNCTION CAPACITANCE

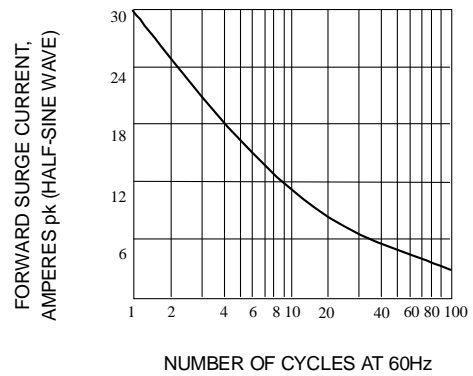


Fig. 5-PEAK FORWARD SURGE CURRENT

Note: Specifications are subject to change without notice. For more details and updates, please visit our website.